
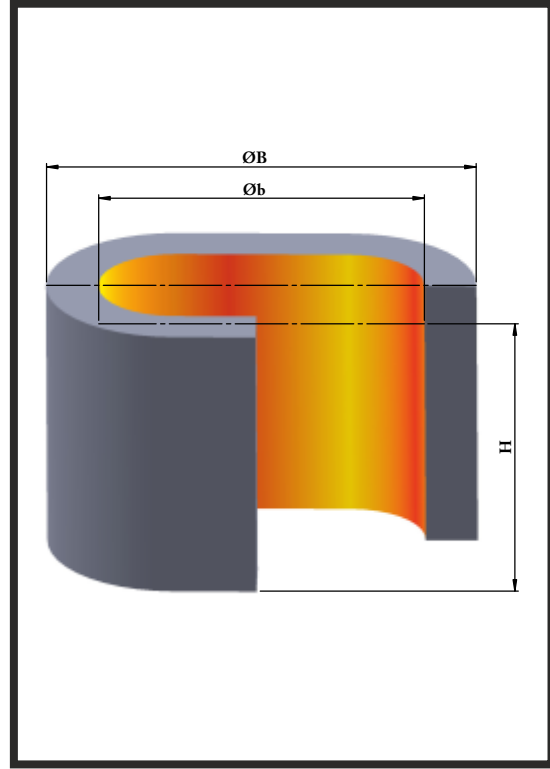


GES FOUNDRY PRODUCTS METALLURGY

OKX OVAL TYPE EXOTHERMIC FEEDER

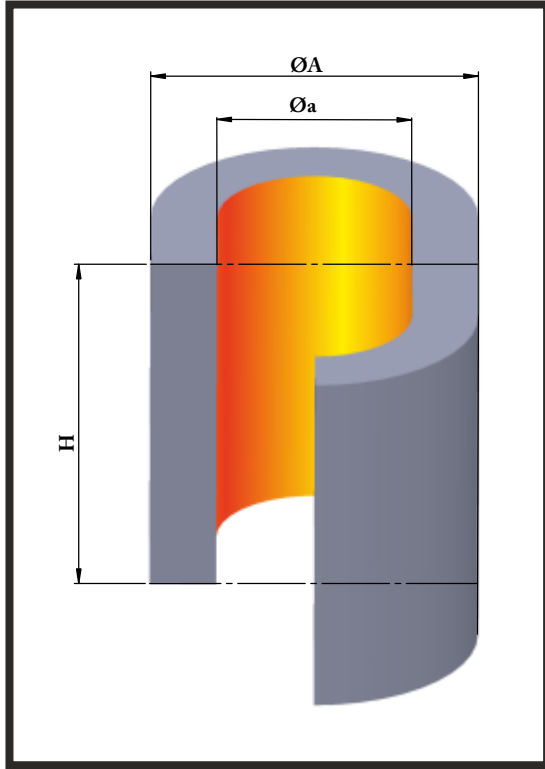

NO	FEEDER CODE	MODULE (cm)		DIMENSIONS (mm)					VOLUME
		FEEDER	CAST PART	a	A	b	B	H	dm3
1	OKX 4	2,60	1,70	60	90	144	174	150	1,2
2	OKX 5	3,00	2,00	80	120	160	200	150	1,7
3	OKX 6	3,90	2,60	100	140	200	240	200	3,5
4	OKX 6/300	4,20	2,80	100	140	200	240	300	5,3
5	OKX 7	4,40	2,90	120	164	240	284	200	5,1
6	OKX 7/300	4,80	3,20	120	164	240	284	300	7,7
7	OKX 8	4,80	3,20	140	188	280	328	200	7,0
8	OKX 8/300	5,60	3,70	140	188	280	328	300	10,5
9	OKX 9	5,20	3,60	160	212	320	372	200	9,1
10	OKX 10	5,50	3,80	180	236	360	416	200	11,6
11	OKX 10/300	6,40	4,40	180	236	360	416	300	17,3
12	OKX 10,5/300	6,50	4,50	235	287	325	377	300	19,7
13	OKX 11	6,10	4,20	200	260	400	460	200	14,3
14	OKX 11/300	6,80	4,70	200	260	400	460	300	21,4
15	OKX 12/300	7,50	5,20	230	296	455	521	300	28,0
16	OKX 13/300	7,90	5,50	250	314	495	559	300	33,1
17	OKX 14/300	8,80	6,10	300	359	600	659	300	48,2